


# **FortiGate® 200D Series**

FortiGate 200D, 200D-POE, 240D, 240D-POE and 280D-POE



The Fortinet Enterprise Firewall Solution delivers end-to-end network security with one platform, one network security operating system and unified policy management with a single pane of glass — for **the industry's best protection against the most advanced security threats and targeted attacks**.

2 Million

Concurrent

**310 Mbps** Threat Protection



## **Security Fabric Integration**

FortiGate appliances, interconnected with the Fortinet Security Fabric, form the backbone of the Fortinet Enterprise Solution.



#### **Deployment Modes**

Distributed Enterprise Firewall Next Generation Firewall



## Hardware Acceleration SPU NP4Lite and CP8



#### **Third-Party Certifications**





350 Mbps

IPS




330 Mbps

3 to 4 Gbps

Firewall

# HARDWARE


## FortiGate 200D(-POE)

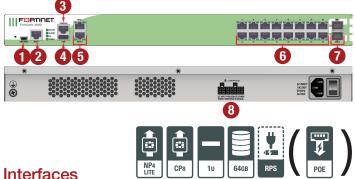

#### interfaces

- 1. USB Management Port
- 2. Management Port
- 3. Console Port
- 4. USB Port
- 5. 2x GE RJ45 WAN Interfaces
- 16x GE RJ45 LAN Interfaces / 8x GE RJ45 LAN and 8x GE RJ45 PoE Interfaces on POE Model
- 7. 2x GE SFP DMZ Interfaces
- 8. FRPS Connector

## FortiGate 280D-POE

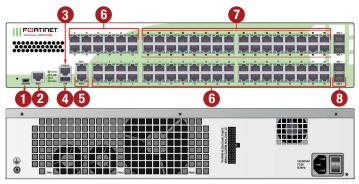


## Powered by SPU



 Custom SPU processors provide the performance needed to block emerging threats, meet rigorous third-party

certifications, and ensure that your network security solution does not become a network bottleneck

## FortiGate 240D(-POE)

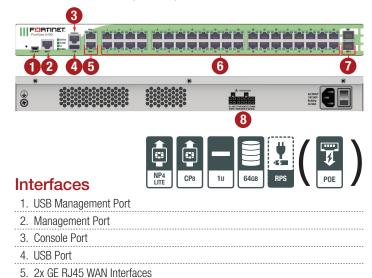

- 6. 40x GE RJ45 LAN Interfaces / 16x GE RJ45 LAN and 24x GE RJ45 PoE Interfaces on POE Model
- 7. 2x GE SFP DMZ Interfaces
- 8. FRPS Connector



#### Interfaces

| 1. USB Management Port | 5. 2x GE RJ45 WAN Interfaces      |
|------------------------|-----------------------------------|
| 2. Management Port     | 6. 52x GE RJ45 LAN Interfaces     |
| 3. Console Port        | 7. 32x GE RJ45 PoE LAN Interfaces |
| 4. USB Port            | 8. 4x GE SFP DMZ Interfaces       |

## **Network Processor**

The SPU NP4Lite network processor works inline with firewall and VPN functions delivering:

- Wire-speed firewall performance for any size packets
- VPN acceleration
- Anomaly-based intrusion prevention, checksum offload and packet defragmentation
- Traffic shaping and priority queuing

#### **Content Processor**


The SPU CP8 content processor works outside of the direct flow of traffic, providing high-speed cryptography and content inspection services including:

- Signature-based content inspection acceleration
- Encryption and decryption offloading

## SOFTWARE

## **FortiOS**

Control all the security and networking capabilities across the entire FortiGate platform with one intuitive operating system. Reduce operating expenses and save time with a truly consolidated next generation security platform.

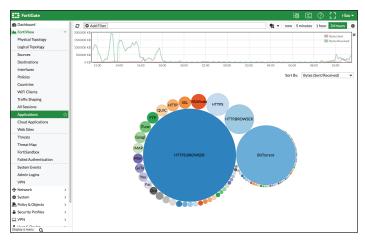

- A truly consolidated platform with one OS for all security and networking services for all FortiGate platforms.
- Industry-leading protection: NSS Labs Recommended, VB100, AV Comparatives and ICSA validated security and performance.
- Control thousands of applications, block the latest exploits, and filter web traffic based on millions of real-time URL ratings.
- Detect, contain and block advanced attacks automatically in minutes with integrated advanced threat protection framework.
- Solve your networking needs with extensive routing, switching, WiFi, LAN and WAN capabilities.
- Activate all the SPU-boosted capabilities you need on the fastest firewall platform available.

For more information, please refer to the FortiOS data sheet available at www.fortinet.com

## SERVICES

#### FortiGuard<sup>™</sup> Security Services

FortiGuard Labs offers real-time intelligence on the threat landscape, delivering comprehensive security updates across the full range of Fortinet's solutions. Comprised of security threat researchers, engineers, and forensic specialists, the team collaborates with the world's leading threat monitoring organizations, other network and security vendors, as well as law enforcement agencies:

- Real-time Updates 24x7x365 Global Operations research security intelligence, distributed via Fortinet Distributed Network to all Fortinet platforms.
- Security Research FortiGuard Labs have discovered over 170 unique zero-day vulnerabilities to date, totaling millions of automated signature updates monthly.
- Validated Security Intelligence Based on FortiGuard intelligence, Fortinet's network security platform is tested and validated by the world's leading third-party testing labs and customers globally.

## FortiCare<sup>™</sup> Support Services

Our FortiCare customer support team provides global technical support for all Fortinet products. With support staff in the Americas, Europe, Middle East and Asia, FortiCare offers services to meet the needs of enterprises of all sizes:

- Enhanced Support For customers who need support during local business hours only.
- Comprehensive Support For customers who need aroundthe-clock mission critical support, including advanced exchange hardware replacement.
- Advanced Services For global or regional customers who need an assigned Technical Account Manager, enhanced service level agreements, extended software support, priority escalation, on-site visits and more.
- Professional Services For customers with more complex security implementations that require architecture and design services, implementation and deployment services, operational services and more.



#### **Enterprise Bundle**

FortiGuard Labs delivers a number of security intelligence services to augment the FortiGate firewall platform. You can easily optimize the protection capabilities of your FortiGate with the FortiGuard Enterprise Bundle. This bundle contains the full set of FortiGuard security services plus FortiCare service and support offering the most flexibility and broadest range of protection all in one package.

# F#RTINET

# **SPECIFICATIONS**

|  | FORTIGATE 200D                        | FORTIGATE 200D-POE                     | FORTIGATE 240D                        | FORTIGATE 240D-POE                    | FORTIGATE 280D-POE                    |
|--|---------------------------------------|--|---------------------------------------|---------------------------------------|---------------------------------------|
| Hardware Specifications                                |                                       |  |                                       |                                       |                                       |
| GE RJ45 WAN Interfaces                                 | 2                                     | 2                                      | 2                                     | 2                                     | 2                                     |
| GE RJ45 LAN Interfaces                                 | 16                                    | 8                                      | 40                                    | 16                                    | 52                                    |
| GE RJ45 PoE LAN Interfaces                             | -                                     | 8                                      | -                                     | 24                                    | 32                                    |
| GE SFP DMZ Interfaces                                  | 2                                     | 2                                      | 2                                     | 2                                     | 4                                     |
| USB (Client / Server)                                  | 1/1                                   | 1/1                                    | 1/1                                   | 1/1                                   | 1/1                                   |
| Console (RJ45)   | 1                                     | 1                                      | 1                                     | 1                                     | 1                                     |
| Local Storage  | 64 GB                                 | 64 GB                                  | 64 GB                                 | 64 GB                                 | 64 GB                                 |
| Included Transceivers                                  | 0                                     | 0                                      | 0                                     | 0                                     | 0                                     |
| System Performance                                     |                                       |  |                                       |                                       |                                       |
| Firewall Throughput (1518 / 512 / 64 byte UDP packets) | 3 / 3 / 3 Gbps                        | 3 / 3 / 3 Gbps                         | 4 / 4 / 4 Gbps                        | 4 / 4 / 4 Gbps                        | 4 / 4 / 4 Gbps                        |
| Firewall Latency (64 byte UDP packets)                 | 2 µs                                  | 2 µs                                   | 6 µs                                  | 6 µs                                  | 2 µs                                  |
| Firewall Throughput (Packets Per Second)               | 4.5 Mpps                              | 4.5 Mpps                               | 6 Mpps                                | 6 Mpps                                | 6 Mpps                                |
| Concurrent Sessions (TCP)                              | 2 Million                             | 2 Million                              | 2 Million                             | 2 Million                             | 2 Million                             |
| New Sessions/Second (TCP)                              | 77,000                                | 77,000                                 | 77,000                                | 77,000                                | 77,000                                |
| Firewall Policies                                      | 10,000                                | 10,000                                 | 10,000                                | 10,000                                | 10,000                                |
| IPsec VPN Throughput (512 byte packets)                | 1.3 Gbps                              | 1.3 Gbps                               | 1.3 Gbps                              | 1.3 Gbps                              | 1.3 Gbps                              |
| Gateway-to-Gateway IPsec VPN Tunnels                   | 2,000                                 | 2,000                                  | 2,000                                 | 2,000                                 | 2,000                                 |
| Client-to-Gateway IPsec VPN Tunnels                    | 5,000                                 | 5,000                                  | 5,000                                 | 5,000                                 | 5,000                                 |
| SSL-VPN Throughput                                     | 400 Mbps                              | 400 Mbps                               | 400 Mbps                              | 400 Mbps                              | 400 Mbps                              |
| Concurrent SSL-VPN Users (Recommended Maximum)         | 300                                   | 300                                    | 300                                   | 300                                   | 300                                   |
| IPS Throughput (HTTP / Enterprise Mix) <sup>1</sup>    | 1.7 Gbps / 350 Mbps                   | 1.7 Gbps / 350 Mbps                    | 2.1 Gbps / 350 Mbps                   | 2.1 Gbps / 350 Mbps                   | 2.1 Gbps / 350 Mbps                   |
| SSL Inspection Throughput <sup>2</sup>                 | 340 Mbps                              | 340 Mbps                               | 340 Mbps                              | 340 Mbps                              | 340 Mbps                              |
| Application Control Throughput <sup>3</sup>            | 600 Mbps                              | 600 Mbps                               | 600 Mbps                              | 600 Mbps                              | 600 Mbps                              |
| NGFW Throughput <sup>4</sup>                           | 330 Mbps                              | 330 Mbps                               | 330 Mbps                              | 330 Mbps                              | 330 Mbps                              |
| Threat Protection Throughput <sup>5</sup>              | 310 Mbps                              | 310 Mbps                               | 310 Mbps                              | 310 Mbps                              | 310 Mbps                              |
| CAPWAP Throughput 6                                    | 1.8 Gbps                              | 1.8 Gbps                               | 1.8 Gbps                              | 1.8 Gbps                              | 1.8 Gbps                              |
| Virtual Domains (Default / Maximum)                    | 10 / 10                               | 10/10                                  | 10 / 10                               | 10 / 10                               | 10 / 10                               |
| Maximum Number of FortiAPs (Total / Tunnel Mode)       | 128 / 64                              | 128/64                                 | 128 / 64                              | 128/64                                | 128 / 64                              |
| Maximum Number of FortiTokens                          | 1,000                                 | 1,000                                  | 1,000                                 | 1,000                                 | 1,000                                 |
| Maximum Number of Registered FortiClients              | 600                                   | 600                                    | 600                                   | 600                                   | 600                                   |
| High Availability Configurations                       | 000                                   |  | ive / Active, Active / Passive, Clus  |                                       | 000                                   |
| Dimensions   |                                       | ,                                      |                                       | loning                                |                                       |
|  | 1 75 y 17 01 y 11 79                  | 1 75 v 17 01 v 19 14                   | 1 75 v 17 01 v 11 79                  | 1 75 v 17 01 v 19 14                  | 2 5 y 17 0 y 11 0                     |
| Height x Width x Length (inches)                       | 1.75 x 17.01 x 11.73                  | 1.75 x 17.01 x 13.14<br>44 x 432 x 334 | 1.75 x 17.01 x 11.73                  | 1.75 x 17.01 x 13.14                  | 3.5 x 17.2 x 11.8                     |
| Height x Width x Length (mm)                           | 44 x 432 x 298                        |  | 44 x 432 x 298                        | 44 x 432 x 334                        | 89 x 437 x 300                        |
| Weight<br>Form Factor                                  | 10.5 lbs (4.8 kg)<br>Rack Mount, 1 RU | 12.6 lbs (5.7 kg)<br>Rack Mount, 1 RU  | 10.5 lbs (4.8 kg)<br>Rack Mount, 1 RU | 13.2 lbs (6.0 kg)<br>Rack Mount, 1 RU | 17.0 lbs (7.6 kg)<br>Rack Mount, 2 RU |
|  |                                       |  |                                       |                                       | naon mount, 2 HO                      |
| Environment  | 100 2401/40 50 6011-                  | 100 2401/ 40 50 60 15                  | 100 2401/ 40 50 6015                  | 100 2400 40 50 60 15                  | 100 2401/40 50 6011-                  |
| Power<br>Movimum Current                               | 100–240V AC, 50–60 Hz                 | 100–240V AC, 50–60 Hz                  | 100–240V AC, 50–60 Hz                 | 100–240V AC, 50–60 Hz                 | 100-240V AC, 50-60 Hz                 |
| Maximum Current  | 110 V / 3 A, 220 V / 1.5 A            | 110 V / 7 A, 220 V / 3.5 A             | 110 V / 3 A, 220 V / 1.5 A            | 110 V / 7 A, 220 V / 3.5 A            | 110 V / 7 A, 220 V / 3.5 A            |
| Total Available PoE Power Budget*                      | -<br>40 / 02 W/                       | 270 W                                  | -<br>66 / 00 W/                       | 270 W                                 | 270 W                                 |
| Power Consumption (Average / Maximum)                  | 49 / 83 W                             | 122 / 205 W                            | 66 / 99 W                             | 211 / 375 W                           | 228 / 418 W                           |
| Heat Dissipation                                       | 283 BTU / h                           | 700. BTU / h                           | 338 BTU / h                           | 1280 BTU / h                          | 1426 BTU/h                            |
| Operating Temperature                                  | 32-104°F (0-40°C)                     | 32-104°F (0-40°C)                      | 32-104°F (0-40°C)                     | 32-104°F (0-40°C)                     | 32-104°F (0-40°C)                     |
| Storage Temperature                                    | -31–158°F (-35–70°C)                  | -31–158°F (-35–70°C)                   | -31–158°F (-35–70°C)                  | -31–158°F (-35–70°C)                  | -31–158°F (-35–70°C)                  |
| Humidity   | 20–90% non-condensing                 | 20–90% non-condensing                  | 20–90% non-condensing                 | 20–90% non-condensing                 | 20–90% non-condensing                 |
| Operating Altitude                                     | Up to 7,400 ft (2,250 m)              | Up to 7,400 ft (2,250 m)               | Up to 7,400 ft (2,250 m)              | Up to 7,400 ft (2,250 m)              | Up to 7,400 ft (2,250 m)              |
| Compliance   |                                       |  |                                       |                                       |                                       |
|  |                                       |  |                                       |                                       |                                       |

Certifications

FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB

ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN; USGv6/IPv6

Note: All performance values are "up to" and vary depending on system configuration. IPsec VPN performance is based on 512 byte UDP packets using AES-256+SHA1. 1. IPS performance is measured using 1 Mbyte HTTP and Enterprise Traffic Mix. 2. SSL Inspection is measured with IPS enabled and HTTP traffic, using TLS v1.2 with AES256-SHA. 3. Application Control performance is measured with 64 Kbytes HTTP traffic. 4. NGFW performance is measured with IPS and Application Control enabled, based on Enterprise Traffic Mix. 5. Threat Protection performance is measured with IPS and Application Control and Malware protection enabled, based on Enterprise Traffic Mix. 6. CAPWAP performance is based on 1444 byte UDP packets.

For complete, up-to-date and detailed feature set, please refer to the Administration Handbook and FortiOS Datasheet. \* Maximum loading on each PoE port is 15.4 W (802.3af).

## **ORDER INFORMATION**

| Product                            | SKU         | Description   |
|------------------------------------|-------------|---|
| FortiGate 200D                     | FG-200D     | 18x GE RJ45 (including 16x LAN ports, 2x WAN ports), 2x GE SFP DMZ ports, SPU NP4Lite and CP8 hardware accelerated, 64 GB onboard SSD storage.  |
| FortiGate 200D-POE                 | FG-200D-POE | 18x GE RJ45 (including 8x LAN and 2x WAN, 8x POE), 2x SFP, SPU NP4Lite and CP8 hardware accelerated, 64 GB onboard SSD storage.   |
| FortiGate 240D                     | FG-240D     | 42x GE RJ45 ports (including 40x LAN ports, 2x WAN ports), 2x GE SFP DMZ ports, SPU NP4Lite and CP8 hardware accelerated, 64 GB onboard SSD storage.  |
| FortiGate 240D-POE                 | FG-240D-POE | 42x GE RJ45 ports (including 16x LAN ports, 2x WAN ports, 24x POE ports), 2x GE SFP slots, SPU NP4Lite and CP8 hardware accelerated,<br>64 GB onboard SSD storage.  |
| FortiGate 280D-POE                 | FG-280D-POE | 86x GE RJ45 ports (including 52x LAN ports, 2x WAN ports, 32x PoE ports), 4x GE SFP DMZ ports, SPU NP4Lite and CP8 hardware accelerated,<br>64 GB onboard SSD storage.  |
| Optional Accessories               |             |   |
| External redundant AC power supply | FRPS-100    | External redundant AC power supply for up to 4 units: FG-300C, FG-310B, FS-348B and FS-448B. Up to 2 units: FG-200B, FG-200D, FG-240D and FG-300D, FG-400D, FG-500D, FG-500D, FG-500D, FDD-200B, FDD-400B, FDD-600B and FDD-800B. |
| Redundant AC power supply          | FRPS-740-FG | Redundant AC power supply for up to 2 units: FG-240D-POE and FG-280D-POE.   |



GLOBAL HEADQUARTERS Fortinet Inc. 899 KIFER ROAD Sunnyvale, CA 94086 United States Tel: +1.408.235.7700 www.fortinet.com/sales

EMEA SALES OFFICE 905 rue Albert Einstein 06560 Valbonne France Tel: +33.4.8987.0500

APAC SALES OFFICE 300 Beach Road 20-01 The Concourse Singapore 199555 Tel: +65.6395.2788

LATIN AMERICA SALES OFFICE Sawgrass Lakes Center 13450 W. Sunrise Blvd., Suite 430 Sunrise, FL 33323 United States Tel: +1.954.368.9990